

🐱 ₩ 🛪 # [m] git 🗠 🎔 🕲 🕄

 \odot

Partly Cloudy IPA

Joining Cloud VMs to FreeIPA

André Boscatto

Sr. Product Owner for Identity and Access Management in RHEL

What we'll discuss today

- **The problem**: pain-free identity management in hybrid cloud envs
- **Solution overview**: the Podengo project
- Brief technical details
- Demo time!
- **Gaps**, future directions, **opportunities**



Introductions

 \odot

- I work in the Identity Management team at Red Hat
- The Podengo project is the hard work of a small sub-team, assisted by many collaborators (service delivery, UX, docs, ...)
- This presentation is also a collaboration (already presented at *Everything Open 2025* and to be presented at *DevConf.in*)

About myself: I love to listen to other people's stories, learning to play the transverse flute, originally from Brazil but living in Europe for the past 5 years!



Assumed Knowledge

- A basic understanding of cloud computing: cloud providers and VMs
- Basic identity management concepts: hosts and users, SSH, HBAC

But André, I don't know all those things, what about now? Well, there are people in this room more capable than me to answer all your questions, save them for later and we will help you :)





What problem are we trying to solve?

 \odot

Cloud VMs

So you launched a VM...

- How do you authenticate to it? (most often: SSH keys)
- How does it authenticate to other machines / services?
- What if many users need to access the machine / workload?
- What if someone leaves the company or you have to revoke access?
- How do you enforce access policies?



Identity management approaches for cloud VMs

- Just use SSH keys doesn't scale well
- SSH certificates scales well, but requires special-purpose PKI
- Privileged Account Management 3rd party [commercial] solutions
- Corporate IdM (FreeIPA, AD) need to enrol clients somehow
- Corporate cloud-based IdM (Entra ID) host authentication techniques not mature




Identity management approaches for cloud VMs

- Just use SSH keys doesn't scale well
- SSH certificates scales well, but requires special-purpose PKI
- Privileged Account Management 3rd party [commercial] solutions
- Corporate IdM (FreeIPA, AD) need to enrol clients somehow
- Corporate cloud-based IdM (Entra ID) host authentication techniques not mature



Joining cloud VMs - today

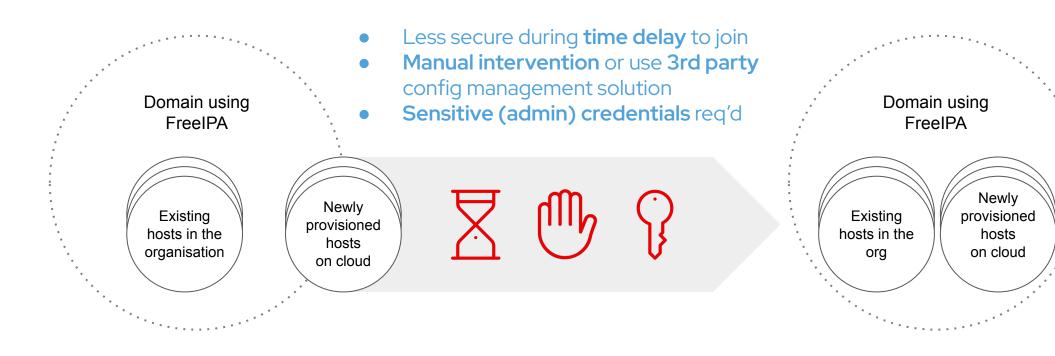

New VMs are not in the IPA domain – no user access except via SSH keys and no policy enforcement This is the problem

Hosts joined to the domain recognise org users and enforce security policies £



The bottom line

- Reduce complexity and cost of robust identity management in cloud environments
- Let companies use their existing IdM to enable easy and safe transition to hybrid cloud environment
- **Don't sacrifice security** in the name of convenience



Podengo and Red Hat Hybrid Cloud Console

Solution Overview



Podengo Project

- <u>Portuguese podengo</u> a dog with three sub-breeds (a la Kerberos)
- Pod (containers) + Go (language)
- Every project should have a cute mascot!
- <u>https://github.com/podengo-project</u>



https://commons.wikimedia.org/wiki/File:Podengo podengo portobello sitting.jpg Public domain



Podengo Project

- idmsvc-backend: service backend running on Red Hat Hybrid Cloud Console (Golang)
 - OpenAPI spec: <u>github.com/podengo-project/idmsvc-api</u>
- idmsvc-frontend: service UI (React / PatternFly / TypeScript)
- ipa-hcc-server: enrollment agent plugin for IPA server
- **ipa-hcc-client**: client package with auto-join behaviour



Red Hat Hybrid Cloud Console

- Hosted services to manage Red Hat environments
- For **RHEL**: Red Hat Insights, inventory, images, **Domain Join**
- Supports multiple cloud providers



A solution in three acts

- 1. **Register** your [Free]IPA deployment with Podengo Service (HCC in our case)
- 2. Build images containing the client RPMs
- 3. Launched VMs get introduced to IPA, and securely enrol



Domain Join - benefits



Leverage existing IAM

Join cloud VMs to the organisation's existing identity management system



Automatic and immediate

Newly provisioned hosts in their cloud immediately* join their domain without any further user intervention.



Գ

No credentials seen by the service (in this case, HCC)

Launched VMs communicate securely with HCC and the IPA server.




 \odot

How does it work?

 \odot

Architecture Overview

 \odot

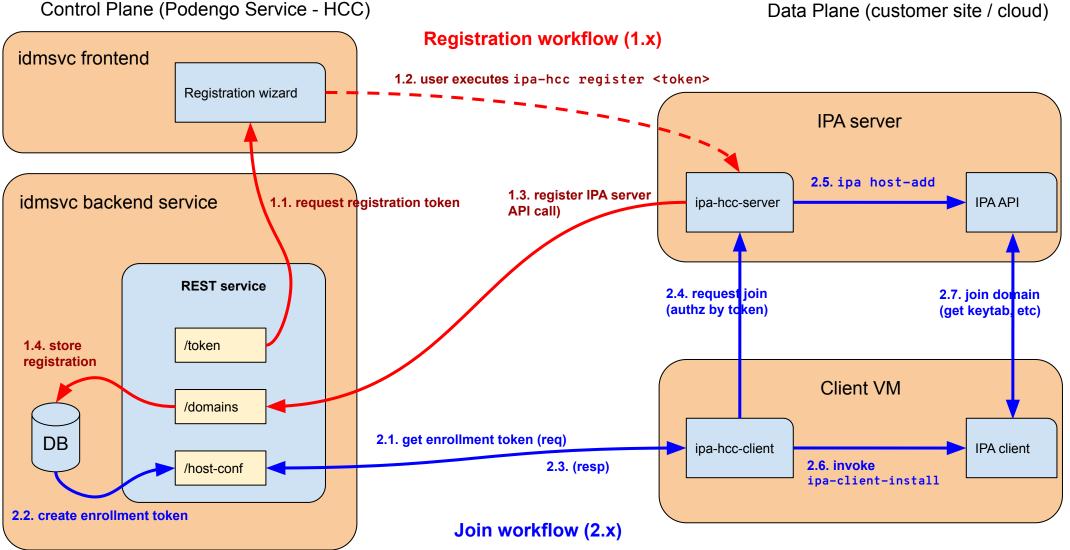

ud)

Troubleshooting

- Several things have to be "just right" for this to work
- HCC and IPA server must be reachable from the cloud environment
- DNS, routes and firewalls can all cause problems
- IPA uses lots of ports for lots of protocols: https, ldap, ldaps, kerberos, kpasswd, dns, ...
- Clocks have to be in sync
- **tl;dr** *it*'s always DNS


F





Step 1: Registration

 \odot

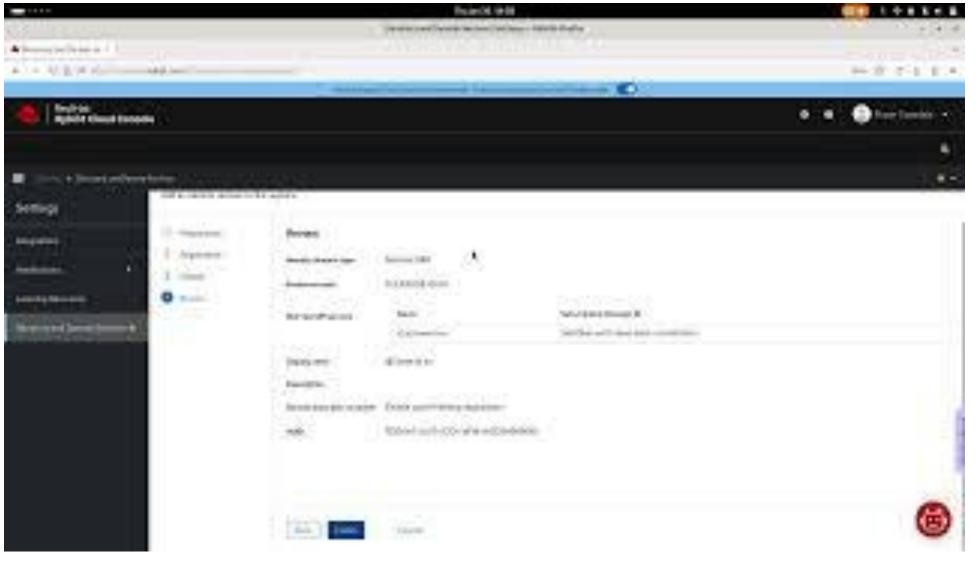

https://is.gd/MMhFHE

Step 2: Building an image

		Paint dial	
		want fails including	
Arrent 11			and the second se
 * + 32/2 (0.0 mm) 			H 2 7 1 1 4
A Refer that to	nede .		a a 🌐 her henne 🔹
A Desc.			•
 	16.U		1.45
Automotion	trappe = 5		
-			
tion of the second s	(1) Inspression	Acottoni parkape	
1000	10 You mark	Supervise recent and insult and dealer that the second	
-	interfectors).		
inter Second	0	B Second Registration property results of an interface of the second se second second sec	
Andrew I	from .		
Denset:	Costron	a server (manual server)	11111
	Cryster		1.0.000
Name:	induction in the second	Telephone Telephone Telephone	and the second s
- Discret	10,0003 10000	2012-1012	5206
	1000	0	
		~	
And Andrew Stade	Addamas (the Approximate Ap	-
Ingentlyment .	1 Junior		(6)
	1.000		

F



https://is.gd/DWerVj

Step 3: Launch and Connect

	Pacado ant	
単形的 いいいいち な	100 B	
hosts matched		
and the second		
Host name: 1p-172-31-176-233		
	51-176-253.djl.frase.id.au(031.FWASE.ID.AU	
	-31-176-233.djl.frase.id.aug031.FAASE.ID.AU	
HCC organization id: 1009307		
	s-9363-d5b2-a39s-fba3d6dc134s	
HCC inventory id: dbs24b5e 8		
HISH CERTIFICATE SUBJECT: 04	18099072,CN=alf257da-9343-4552-a38e-fise3d6dc134a	
Host name: s2.djl.frase.id.a.		
Principal name: host/s2.djl.t		
Principal alias: host/s2.d[1		
	9HA256: muH12dt/2226evEVdt2rhogYk0k94FggKTNALennheo	
	rootEin-172-31-9-10.djl.frase.id.au (ssh-rsa),	
	SHA256:13sSH/05/gY+8LTqLuq20HN;CPu1wP02003+zk30hQs	
	rootgip-172-31-9-10.djl.frase.id.au (ecdss-sha2-nistp256),	
	SHA256: cYEx0aD0HHBIgtCTRaHQU6dcHH9q4j GaqLTBqoyX08U	
	rootsig-172-31-9-10.djl.frase.id.au [ssh-ed25519]	
HCC organization id: 1869307		
	1-ce03-4568-94e5-6384633f5fc1	
MMSM certificate subject: 0=)	18993072,CN-348901dd-ce03-4ba8-94e5-a384a83f5fc1	
Author of entries returned 2		
rootes2 -1# ina user-show eid		
Loonabs -14 The deal-place and		

F

 \odot

https://is.gd/DTtFvG

Status, gaps, and possible futures

 \odot

Current status

- Feature is **in production** on Hybrid Cloud Console **preview mode**
- ipa-hcc-{server,client} RPMs are in **Fedora and EPEL** (RHEL later)
- **Documentation** is published but needs expansion
- Cloud provider-specific **onboarding guides** to come
- Collecting metrics and user / customer feedback to inform next steps
- Feedback from **community is more than welcome!**
- Limitation: **one active domain** per org



What could come next?

- Add Active Directory support
 - Expand solution to **more organisations**
- Verify / assist users with cloud environment set up
 - Improve user success without expanding scope
- Support for multiple domains
- Other HCC-specific integrations



A grand vision

- Hosts consume console.redhat.com user identities
- Single unified identity domain
- Option 1: IPA with External IdP (requires IPA)
 - Don't miss Sumit's talk at 12:35!
- Option 2: localkdc (no IPA, hosted IdP -> reduced effort and cost)
 - Enable POSIX system login from cloud / web SSO
 - Don't miss Alexander & Andreas' talk at **13:35!**





Non-Insights/HCC applications

- Our architecture** is not tightly bound to HCC
 - **shameful truth: the code kinda is...
 - HCC: hosts the idmsvc, **authenticates clients**
- What is required to use Podengo in other contexts?
 - X.509 certs for backend/IPA/PKINIT authentication
 - **OR** some other way to authenticate VMs + extend VM->IPA protocol to enable **OTP join**
- Got a use case? Please tell us about it! (GitHub issue, mailing list)






Architecture Overview

Control Plane (HCC)

 \odot

Data Plane (customer site / cloud)

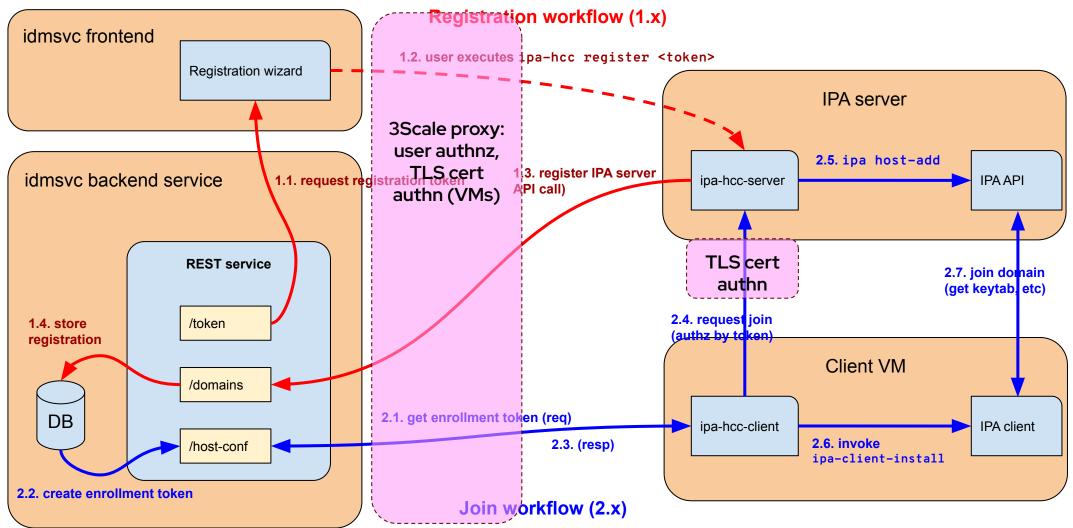



Conclusion

 \odot

Resources

- Official docs: <u>Deploying and managing RHEL systems in hybrid</u> <u>clouds | Red Hat Product Documentation</u>
- github.com/podengo-project
- EO2024 talk: <u>Passwordless Linux FreeIPA Passkey and External IdP</u> <u>login with FreeIPA</u>
- EO2023 talk: Kerberos PKINIT (video ; slides)
- Mailing list: <u>freeipa-users@lists.fedorahosted.org</u>
- This slide deck: <u>https://is.gd/DJzCFF</u>
- Linkedin: <u>https://www.linkedin.com/in/andreboscatto/</u>

F





Questions?

<u>https://commons.wikimedia.org/wiki/File:Three Weavers Cloud City Hazy IPA.jpg</u> CC-BY-4.0 (no changes)



Bonus content unlocked!


 \odot

Architecture Overview (AD)



Control Plane (Podengo Service - HCC)

 \odot

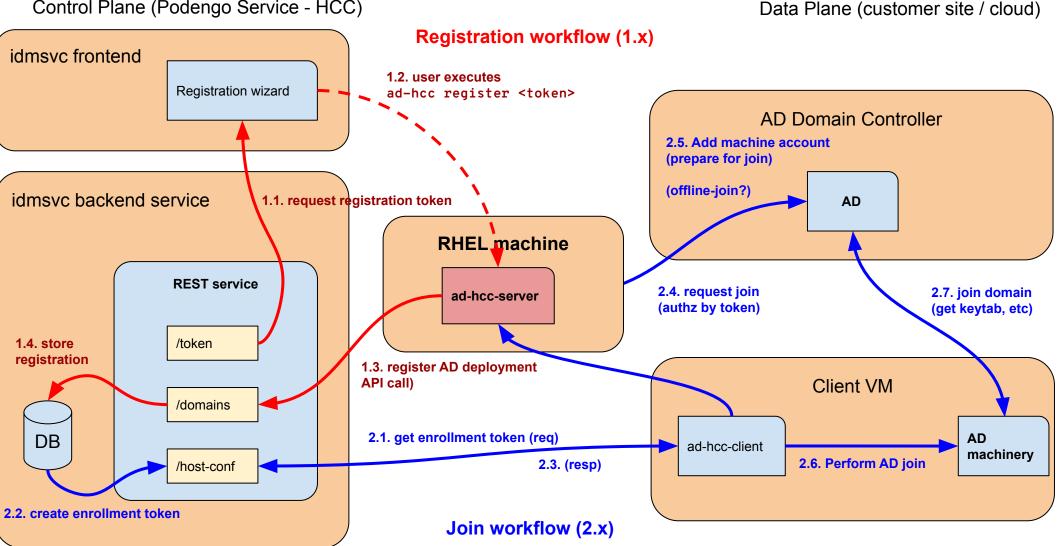



Why does it take 2 minutes to enroll the machine?

- In the infrastructure Podengo Service is installed, a lot of processes are involved, such as Red Hat Subscription manager, insights, etc. In a different infrastructure, you might be able to speed up things.



Do I have to install hcc-server on all my servers?

- No, you can install it on one or two machines.
- Running the command *ipa-hcc register* once takes care of the whole deployment (server-wise)





My topology changed, what does it happen?

- Podengo ha a job service to take care of that. Or you can run it manually in case you want.





What happens if we remove a VM? Does it get unrolled?

- We are glad you asked! Currently we do nothing, we didn't find an easy way to detect if a machine went away and the host entry has to be removed.
- If you have a good idea about how to tackle it down, we would love to hear!



