F fedora

Rust, RPMs and the fine art of dependency building

Fedora eBPF SIG


Daniel Mellado

Principal Software Engineer@Red Hat dmellado@fedoraproject.org

Mikel Olasagasti

Customer Success Executive@Red Hat mikelo2@fedoraproject.org

How it started

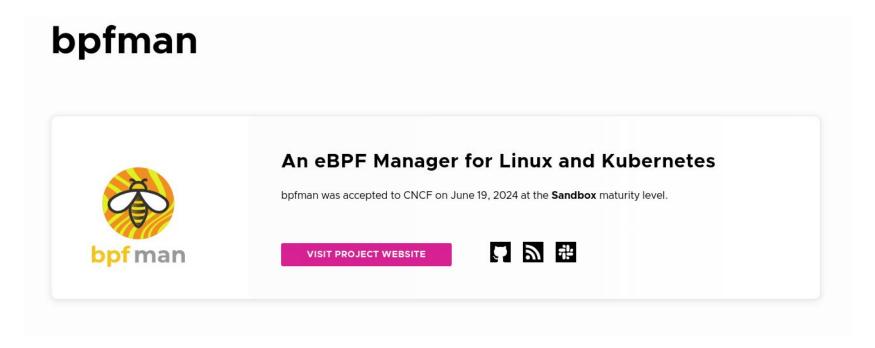

Part of the CNCF since June, 2024



How it started



About News Schedule Stands Volunteer Practical

Brussels / 3 & 4 February 2024



News

Sponsors

Contact

FOSDEM 2024 / Schedule / Events / Developer rooms / Containers / Orchestrating eBPF Applications in Kubernetes and Fedora

Orchestrating eBPF Applications in Kubernetes and Fedora

A Track: Containers devroom

↑ Room: UB2.252A (Lameere)

■ Day: Saturday▶ Start: 15:40■ End: 16:10

■ Video only: ub2252a

Chat: Join the conversation!





How it started

Changes/Add bpfman to Fedora

Page Discussion

Contents [show]

This page was last edited on 22 August 2024, at 14:19.

View history View source Read

Contents [show]

Summary

bpfman: An eBPF Manager bpfman operates as an eBPF manager, focusing on simplifying the deployment and administration of eBPF programs. Its notable features encompass:

- System Overview: Provides insights into how eBPF is utilized in your system.
- eBPF Program Loader: Includes a built-in program loader that supports program cooperation for XDP and TC programs, as well as deployment of eBPF programs from OCI images.
- eBPF Filesystem Management: Manages the eBPF filesystem, facilitating the deployment of eBPF applications without requiring additional privileges.

We do aim to have this included in Fedora 40 and besides the packaging work wanted to create a Self Contained change for wide communication to the community. It provides an easy way to load eBPF program and eventually we'd like for it to become a de-facto standard, but that's outside of the scope of this change.

Owner

- · Name: Daniel Mellado
- Email: dmellado@fedoraproject.org
- · Name: Dave Tucker
- · Email: datucker@redhat.com
- Name: Toke Høiland-Jørgensen
- · Email: thoiland@redhat.com








- bpfman's main component is written in rust
- Available in Fedora starting Fedora 42
- Built mainly using rust2rpm

- Was originally intended for Fedora 40
 - Dependencies...



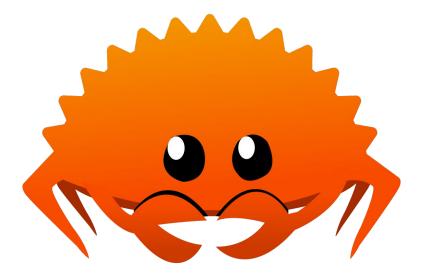



In general, packages SHOULD NOT use bundled crate dependencies, whenever possible.

Rust Packaging Guidelines

Fedora packages SHOULD make every effort to avoid having multiple, separate, upstream projects bundled together in a single package

Fedora Packaging Guidelines

rust2rpm

- <u>rust2rpm</u> is a tool developed by the <u>Rust SIG</u> (Special Interest Group).
- Designed to standardize and streamline the creation of RPM spec files for Rust packages.
- Automates much of the packaging process, reducing manual effort.
- Primarily works with packages from crates.io, fetching metadata and dependencies.
- Written in Python.





- \$ rust2rpm bpfman
- \$ spectool -g rust-bpfman.spec
- \$ fedpkg --release f40 mockbuild

```
Problem 1: nothing provides requested (crate(aya) >= 0.13.1 with crate(aya) < 0.14.0~)

Problem 2: nothing provides requested (crate(aya-obj) >= 0.2.1 with crate(aya-obj) < 0.3.0~)

Problem 3: nothing provides requested (crate(bpfman-csi/default) >= 1.8.0 with crate(bpfman-csi/default) < 2.0.0~)

Problem 4: nothing provides requested (crate(oci-distribution) >= 0.11.0 with crate(oci-distribution) < 0.12.0~)

Problem 5: nothing provides requested (crate(oci-distribution/native-tls) >= 0.11.0 with crate(oci-distribution/native-tls) < 0.12.0~)

Problem 6: nothing provides requested (crate(oci-distribution/trust-dns) >= 0.11.0 with crate(oci-distribution/trust-dns) < 0.12.0~)

Problem 7: nothing provides requested (crate(sigstore) >= 0.10.0 with crate(sigstore) < 0.11.0~)

Problem 8: nothing provides requested (crate(sigstore/cached-client) >= 0.10.0 with crate(sigstore/cached-client) < 0.11.0~)

Problem 9: nothing provides requested (crate(sigstore/cosign-native-tls) >= 0.10.0 with crate(sigstore/cosign-native-tls) < 0.11.0~)

Problem 10: nothing provides requested (crate(sigstore/sigstore-trust-root) >= 0.10.0 with crate(sigstore/sigstore-trust-root) < 0.11.0~)

Problem 11: nothing provides requested (crate(systemd-journal-logger) >= 2.2.0 with crate(systemd-journal-logger) < 3.0.0~)

Problem 12: nothing provides requested (crate(tonic) >= 0.11.0 with crate(tonic/transport) < 0.12.0~)

Problem 13: nothing provides requested (crate(tonic/transport) >= 0.11.0 with crate(tonic/transport) < 0.12.0~)

Problem 14: nothing provides requested (crate(url) >= 2.5.4 with crate(url) < 3.0.0~)
```





Packaging aya?

- \$ rust2rpm aya
- \$ spectool -g rust-aya.spec
- \$ fedpkg --release f40 mockbuild

Problem 1: nothing provides requested (crate(aya-obj/default) >= 0.2.1 with crate(aya-obj/default) < 0.3.0~)
Problem 2: nothing provides requested (crate(aya-obj/std) >= 0.2.1 with crate(aya-obj/std) < 0.3.0~)



Packaging aya-obj for aya?

- \$ rust2rpm aya-obj
- \$ spectool -g rust-aya-obj.spec
- \$ fedpkg --release f40 mockbuild

Problem: nothing provides requested (crate(rbpf) >= 0.3.0 with crate(rbpf) < 0.4.0~)



Packaging rbpf for aya-obj?

- \$ rust2rpm rpbf
- \$ spectool -g rust-rbpf.spec
- \$ fedpkg --release f40 mockbuild

Problem: nothing provides requested (crate(json/default) >= 0.11.0 with crate(json/default) < 0.12.0~)



Packaging json for rbpf?

- \$ rust2rpm json

```
WARNING: Crate 'json' is already packaged for Fedora:

https://src.fedoraproject.org/rpms/rust-json
• Re-run with --no-existence-check to create a new spec file from scratch.
```





Packaging oci-distribution for aya?

- \$ rust2rpm oci-distribution
- \$ spectool -g rust-oci-distribution.spec
- \$ fedpkg --release f40 mockbuild

```
Problem 1: nothing provides requested (crate(docker_credential/default) >= 1.0.0 with crate(docker_credential/default) < 2.0.0~)
Problem 2: nothing provides requested (crate(jwt/default) >= 0.16.0 with crate(jwt/default) < 0.17.0~)
Problem 3: nothing provides requested (crate(olpc-cjson/default) >= 0.1.0 with crate(olpc-cjson/default) < 0.2.0~)
Problem 4: nothing provides requested (crate(testcontainers/default) >= 0.15.0 with crate(testcontainers/default) < 0.16.0~)
```





Packaging sigstore for aya?

- \$ rust2rpm sigstore

(C(1)

- \$ spectool -g rust-sigstore.spec
- \$ fedpkg --release f40 mockbuild

```
Problem 1: nothing provides requested (crate(docker credential/default) >= 1.3.0 with crate(docker credential/default) < 2.0.0~)
Problem 2: nothing provides requested (crate(json-syntax/canonicalize) >= 0.12.0 with crate(json-syntax/canonicalize) < 0.13.0~)
Problem 3: nothing provides requested (crate(json-syntax/default) >= 0.12.0 with crate(json-syntax/default) < 0.13.0~)
Problem 4: nothing provides requested (crate(json-syntax/serde) >= 0.12.0 with crate(json-syntax/serde) < 0.13.0~)
Problem 5: nothing provides requested (crate(oci-distribution) >= 0.11.0 with crate(oci-distribution) < 0.12.0~)
Problem 6: nothing provides requested (crate(oci-distribution/native-tls) >= 0.11.0 with crate(oci-distribution/native-tls) < 0.12.0~)
Problem 7: nothing provides requested (crate(olpc-cjson/default) >= 0.1.0 with crate(olpc-cjson/default) < 0.2.0~)
Problem 8: nothing provides requested (crate(openidconnect) >= 3.5.0 with crate(openidconnect) < 4.0.0~)
Problem 9: nothing provides requested (crate(openidconnect/native-tls) >= 3.5.0 with crate(openidconnect/native-tls) < 4.0.0~)
Problem 10: nothing provides requested (crate(openidconnect/reqwest) >= 3.5.0 with crate(openidconnect/reqwest) < 4.0.0~)
Problem 11: nothing provides requested (crate(rstest/default) >= 0.22.0 with crate(rstest/default) < 0.23.0~)
Problem 12: nothing provides requested (crate(sigstore_protobuf_specs/default) >= 0.3.0 with crate(sigstore_protobuf_specs/default) < 0.4.0~)
Problem 13: nothing provides requested (crate(testcontainers/default) >= 0.22.0 with crate(testcontainers/default) < 0.23.0~)
Problem 14: nothing provides requested (crate(tls_codec/default) >= 0.4.0 with crate(tls_codec/default) < 0.5.0~)
Problem 15: nothing provides requested (crate(tls_codec/derive) >= 0.4.0 with crate(tls_codec/derive) < 0.5.0~)
Problem 16: nothing provides requested (crate(tough/default) >= 0.18.0 with crate(tough/default) < 0.19.0~)
Problem 17: nothing provides requested (crate(tough/http) >= 0.18.0 with crate(tough/http) < 0.19.0~)
Problem 18: nothing provides requested (crate(x509-cert/builder) >= 0.2.0 with crate(x509-cert/builder) < 0.3.0~)
Problem 19: nothing provides requested (crate(x509-cert/default) >= 0.2.0 with crate(x509-cert/default) < 0.3.0~)
Problem 20: nothing provides requested (crate(x509-cert/pem) >= 0.2.0 with crate(x509-cert/pem) < 0.3.0~)
Problem 21: nothing provides requested (crate(x509-cert/sct) >= 0.2.0 with crate(x509-cert/sct) < 0.3.0~)
Problem 22: nothing provides requested (crate(x509-cert/std) >= 0.2.0 with crate(x509-cert/std) < 0.3.0~)
```



- Can you see a trend?





- Missing in Fedora
 - oci-distribution
 - sigstore
 - sled
 - systemd-journal-logger
 - Tonic
- Too new in Fedora
 - netlink-packet-route
 - rtnetlink
- Too old in Fedora
 - comfy-table
 - prost / prost-types





- More than 200 new dependencies are required for bpfman

- What if package is vendored?





Packaging bpfman by bundling dependencies



rust2rpm and cargo issues

- rust2rpm -V auto can generate vendored, but
- rust2rpm can't handle patching of vendored dependencies.
- How can I patch a vendored dependency?
 - Ugly script / hand
- Cargo checksum wrongly identified
- Weak cryptographic dependencies such as p434 elliptic curve may get in such as in fiat-crypto, not allowed by Fedora legal.

```
12 pub mod p256_scalar_32;
13 pub mod p256_scalar_64;
14 pub mod p384_32;
15 pub mod p384_64;
16 pub mod p384_scalar_32;
17 pub mod p384_scalar_64;

18 pub mod p434_64;
19 pub mod p448_solinas_32;
20 pub mod p448_solinas_64;
21 pub mod p521_32;
22 pub mod p521_64;
```







Introducing rust2rpm-vendor Tool

- Tool written by the rust-sig group in order to make the spec creating standarized and seamless.
- Written in python
- -p, --patchDo manual patching of Cargo.toml
- Opens Cargo.toml in the default editor to apply changes and generate a patch file before loading project metadata





```
[package]
edition = "2018"
name = "olpc-cjson"
version = "0.1.4"
authors = ["iliana destroyer of worlds <iweller@amazon.com>"]
build = false
autobins = false
autoexamples = false
autotests = false
autobenches = false
description = "serde_json Formatter to serialize as OLPC-style canonical JSON"
readme = "README.md"
keywords = ["json"]
license = "MIT OR Apache-2.0"
repository = "https://github.com/awslabs/tough"
resolver = "2"
[lib]
name = "olpc_cjson"
path = "src/lib.rs"
[[bin]]
name = "olpc-cjson"
path = "src/main.rs"
[dependencies.serde]
version = "1"
[dependencies.serde_json]
version = "1"
```





Some offending spec files

- https://src.fedoraproject.org/rpms/bpfman/raw/rawhide/f/bpfman.spec
- https://src.fedoraproject.org/rpms/fractal/raw/rawhide/f/fractal.spec



Final result

Daniel Mellado 2024-03-13 18:35:02 UTC

Spec URL: https://dmellado.fedorapeople.org/bpfman/bpfman.spec
SRPM URL: https://dmellado.fedorapeople.org/bpfman/
bpfman-0.4.0-0.1.20240313gita11dd61.fc39.src.rpm

Description:
bpfman operates as an eBPF manager, focusing on simplifying the deployment and administration of eBPF programs.

Fedora Account System Username: dmellado


9 months of work from first proposal until a proper package and bundling process is defined.

Fedora Admin user for bugzilla script actions 2024-12-12 08:37:46 UTC Comment 73

The Pagure repository was created at https://src.fedoraproject.org/rpms/bpfman



Future work at the rust-sig

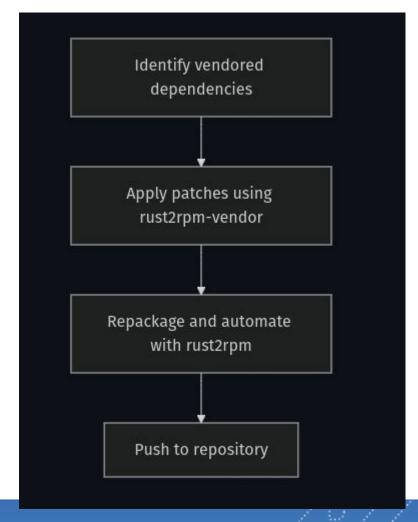





Future work at the rust-sig

```
1 w # Fedora Rust Hackfest 2025-01-29
    ## Vendoring
    - tooling support for "patching" vendored contents:
      https://pagure.io/fedora-rust/rust2rpm/issue/286
          - Tool living inside rust2rpm-helper
          - https://pagure.io/fedora-rust/rust2rpm-helper/blob/main/f/src
          -> @dmellado
    ## Licenses
    - tool for simplifying License expressions:
      https://pagure.io/fedora-rust/rust2rpm/issue/306
      -> @decathorpe
    ## Documentation
    - https://pagure.io/fedora-rust/rust2rpm-cookbook

    hosting rendered manpages (creating tox)

      -> @decathorpe
    ## Tooling
    - rpmlint rules for empty +feature subpkgs (`rust-$crate+feature-devel`,
     `python3-foo+extra`) - ignore "W: no-documentation"
    - ship rpmlintrc configs with built packages?
      -> FPC
    - warn for executable `*.rs` files in rust2rpm:
      https://pagure.io/fedora-rust/rust2rpm/issue/307
      -> @decathorpe
    - add `excluded-arch` https://pagure.io/fedora-rust/rust2rpm/issue/308
      -> Michel
```





Fedora ebpf-sig group



Fedora eBPF SIG Group



- A new sig group was created in late 2023 to gather interest around eBPF in Fedora.
 Fedora eBPF Special Interest Group
- Identified bpfman as a useful tool to use as a bpf manager and decided to push for it to be included in Fedora.
- Maintainers of bpfman rpm alongside rust-sig (Thanks Fabio!)



Key takeaways



Key takeaways

- Bundling rust projects can be an option
- Standardizing tooling allows not having to reinvent wheel for each package
- If trying to package an application written in Rust for Fedora:
 - Ask rust-sig
 - Make sure you've asked rust-sig
 - Work with rust-sig




Questions?



Huge kudos to:

- Fedora's rust-sig guru:
 - Fabio Valentini
- Meta's team for their work in Fedora and hosting the Fedora Rust hackfest:
 - Davide Cavalca
 - Michel Lind







Thank you for attending!

